


BRIDA DESLIZANTE

N° 401

Acero pavonado / Steel blackened

Slotted-heel clamp

Bride coulissante

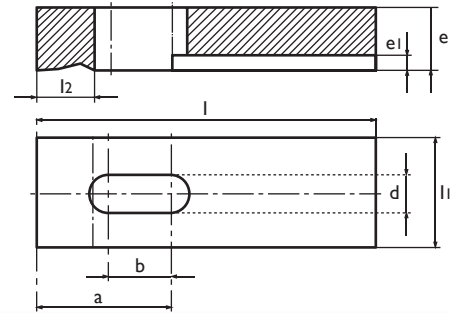

Ref.	d (mm)	l (mm)	ll (mm)	e (mm)	a (mm)	b (mm)	e1 (mm)	l2 (mm)
I9008	7	40	16	10	17	10	3	10
I9009	7	63	16	10	29	17	3	10
I9010	9	50	20	12	22	12	4	12
I9011	9	80	20	12	37	21	4	12
I9012	11	63	25	16	28	16	4,5	16
I9013	11	100	25	16	46	26	4,5	16

Ref.	d (mm)	l (mm)	ll (mm)	e (mm)	a (mm)	b (mm)	e1 (mm)	l2 (mm)
I9014	14	80	32	20	35	20	5	20
I9015	14	125	32	20	58	33	5	20
I9016	16	100	40	25	44	25	6	25
I9017	16	160	40	30	74	42	6	25
I9018	18	160	50	30	73	42	6	32
I9019	22	200	60	30	92	52	8	40


APOYO PARA BRIDA DESLIZANTE

N° 213

Material: Tratado / Heat treated steel

Heel pin

Appui de brides

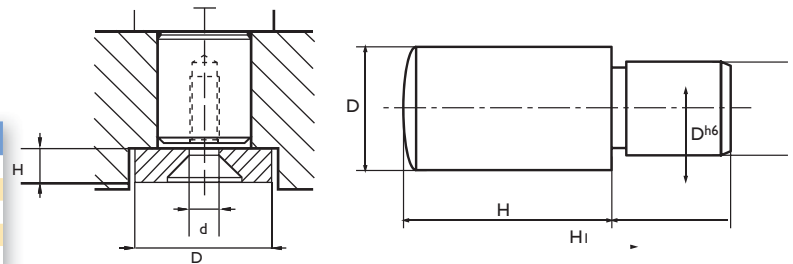

Ref.	D (mm)	Dh6 (mm)	H1 (mm)	H
I9010-1	8	6	8	12
I9012-1	10	8	10	16
I9014-1	12	10	12	20
I9016-1	16	14	16	25
I9019-1	20	16	20	32


BRIDA PARA TORNILLO

N° 405

Acero pavonado / Steel blackened

Drill spot - Heel clamp

Bride a vis

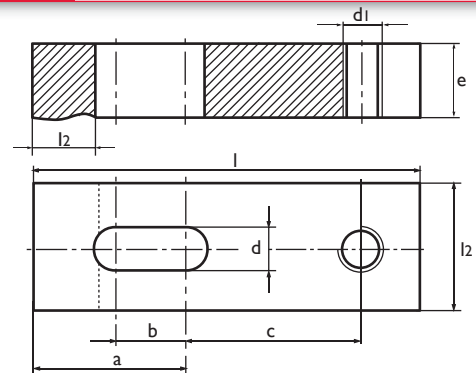


Ref.	d (mm)	l (mm)	ll (mm)	e (mm)	a (mm)	b (mm)	c (mm)	d1 (mm)	l2 (mm)
I9001	7	63	16	10	29	17	28	M-6	10
I9002	9	80	20	12	37	21	35	M-8	12
I9003	11	100	25	16	46	26	44	M-10	16
I9004	14	125	32	20	58	33	55	M-12	20
I9005	16	140	40	30	74	42	50	M-14	25
I9006	18	160	50	30	73	42	71	M-16	32
I9007	22	200	60	30	92	52	88	M-20	40

APOYO REGULABLE PARA BRIDAS DE TORNILLO

N° 215

Adjustable heel pin

Appui de brides

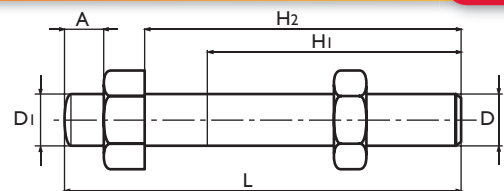

Ref.	D	D1 (mm)	L (mm)	H1 (mm)	H2 (mm)
I9001-1	M-6	6	50	32	40
I9002-1	M-8	8	50	32	40
I9003-1	M-10	10	50	32	40
I9003-2	M-10	10	70	32	56
I9004-1	M-12	12	70	40	56

Ref.	D	D1 (mm)	L (mm)	H1 (mm)	H2 (mm)
I9004-2	M-12	12	95	50	80
I9005-1	M-14	14	100	63	80
I9006-1	M-16	16	100	63	80
I9006-2	M-16	16	120	63	100
I9007-1	M-20	20	120	70	90